


32 322 DC2 MINTA KJØKKENARMATUR

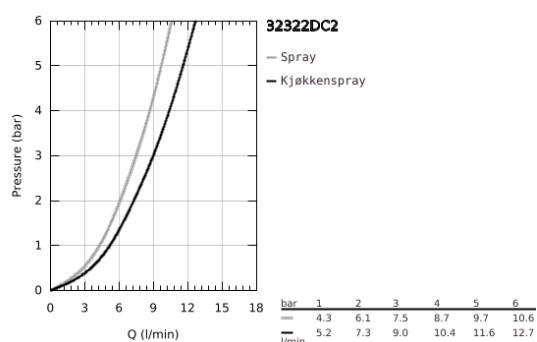

PRODUKTBESKRIVELSE

- Colour: supersteel
- U-tut
- etthullsmontasje
- GROHE Long-Life-overflate
- GROHE SilkMove 46 mm keramisk patron
- GROHE EasyDock garanterer enkel inntrekking og glatt docking tilbake til utgangsposisjonen
- Uttrekkbar spray dobbel
- omstiller: laminar spray / SpeedClean jet-dusj
- variable justerbar volumbegrenser
- svingbar rørtut
- svingradius 360°
- integrert tilbakeslagsventil
- med tilbakeslagsventil
- fleksible tilkoblingsslanger
- rask installasjon
- maximum flow rate (at 3 bar): 9 l/min

The exploded view diagram illustrates the assembly of the microscope. The components are numbered as follows:

- 1:** Objective lens.
- 2:** Lens mount.
- 3:** Lens cap.
- 4:** Eyepiece assembly, including:
 - 4.1:** Eyepiece lens.
 - 4.2:** Eyepiece housing.
- 5:** Base of the microscope.
- 6:** Mounting bracket.
- 7:** Eyepiece.

The diagram shows the relative positions of these components for assembly. A small inset in the top left corner shows a reference image of the assembled microscope and a magnification range of 60-75x.

- 1: Håndgrep (Spare part-nr. 46015DC0)
- 2: Kappe (Spare part-nr. 46025DC0)
- 3: Patron (Spare part-nr. 46048000)
- 4: Uttreksdusj (Spare part-nr. 48416DC0)
- 4.1: Tilbakeslagsventil (Spare part-nr. 08565000)
- 4.2: Perlator (Spare part-nr. 48347000)
- 5: Tilskruing (Spare part-nr. 46345000)
- 6: Dusjslange (Spare part-nr. 48293000)
- 7: Stabiliseringsplate (Spare part-nr. 05334000)
- 8: Håndgrep (Spare part-nr. 40684DC0)*

SIDE 2/2